


# LISTA DE APLICACIONES - BUYERS GUIDE

**21 9657 00**



Qty: 850

Weight: 10.300

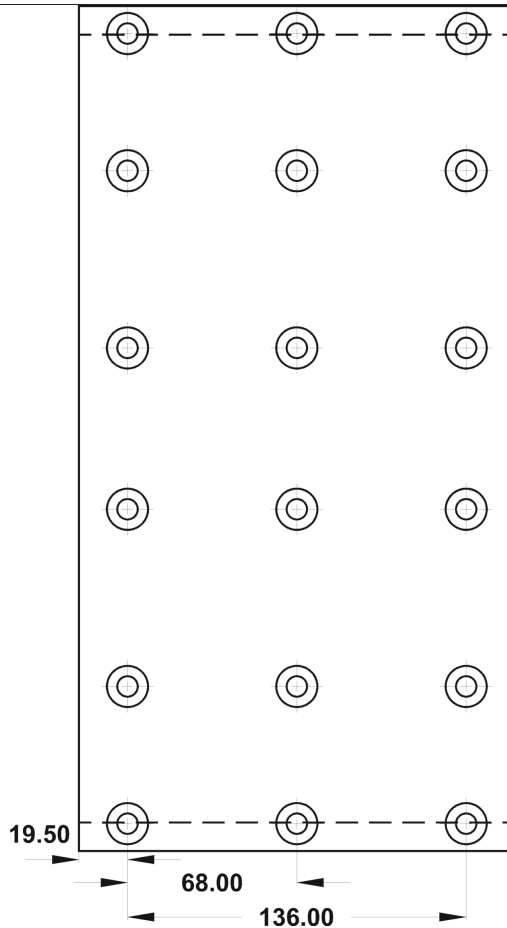

**21 9657 00**



175x13.5x370- Ø414

**WVA**

19657

**MAKE**

RABA

RENAULT TRUCKS



Trac.

CC

Kw

CV



Front / Rear

## RABA

Eje/Axle					Trailer Axle			
160x420	01/73-					01.53-		■

## RENAULT TRUCKS

C Series 10.82-10.98					Concrete Mixer			
C 260.26 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91	■
C 290.26,C 300.26 (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	05.86-10.98	■
C 290.26,C 300.26 (MIDR 06.20.45 D3)	-12/88	Diesel		9839	214	291	05.86-10.98	■

C Series 10.82-10.98					Dump Truck			
C 260.19 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91	■
C 290.19,C 300.19 (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	10.82-10.98	■
C 290.19,C 300.19 (MIDR 06.20.45 D3)	-12/88	Diesel		9839	214	291	10.82-10.98	■

C Series 10.82-10.98					Platform/Chassis			
C 210.19 (MIDS 06.20.30 N)	-12/88	Diesel		8820	153	208	12.83-05.91	■
C 210.19 (MIDS 06.20.30 N)	-12/88	Diesel		8820	153	208	12.83-05.91	■
C 260.19 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91	■
C 260.19,C 280.19 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-10.98	■
C 260.26 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91	■
C 290.26,C 300.26 (MIDR 06.20.45 D)	-12/87	Diesel		9839	214	291	10.82-10.98	■
C 290.26,C 300.26 (MIDR 06.20.45 D3)	-12/87	Diesel		9839	214	291	10.82-10.98	■

C Series 10.82-10.98					Truck Tractor			
C 290.19/T (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	05.86-05.91	■
C 290.19/T (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	05.86-05.91	■

# LISTA DE APLICACIONES - BUYERS GUIDE

G Series 10.82-03.93						Dump Truck			
G 230.17 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 260.17 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G Series 10.82-03.93						Municipal Vehicle			
G 210.17 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.17 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.17 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.17 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.18 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.18 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G Series 10.82-03.93						Platform/Chassis			
G 170.11 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.13 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.15 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.16 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.17 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.17 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 210.16 (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.16 (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 230.17 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 230.17 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 230.19 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 230.19 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 260.16 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.16 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.17 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.17 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19 (MIDS 06.20.45 B)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.24 CIT (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G Series 10.82-03.93						Truck Tractor			
G 230.17/T (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 260.15/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.17/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.22/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■